
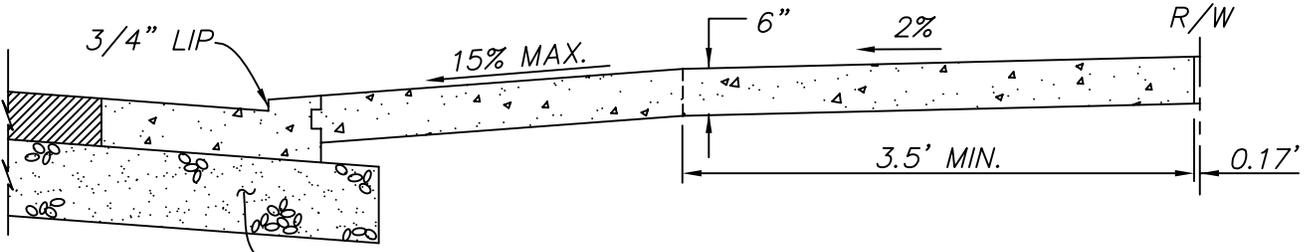


'X'=24" WHERE C.F. IS LESS THAN OR EQUAL TO 6".  
 36" WHERE C.F. IS GREATER THAN 6".

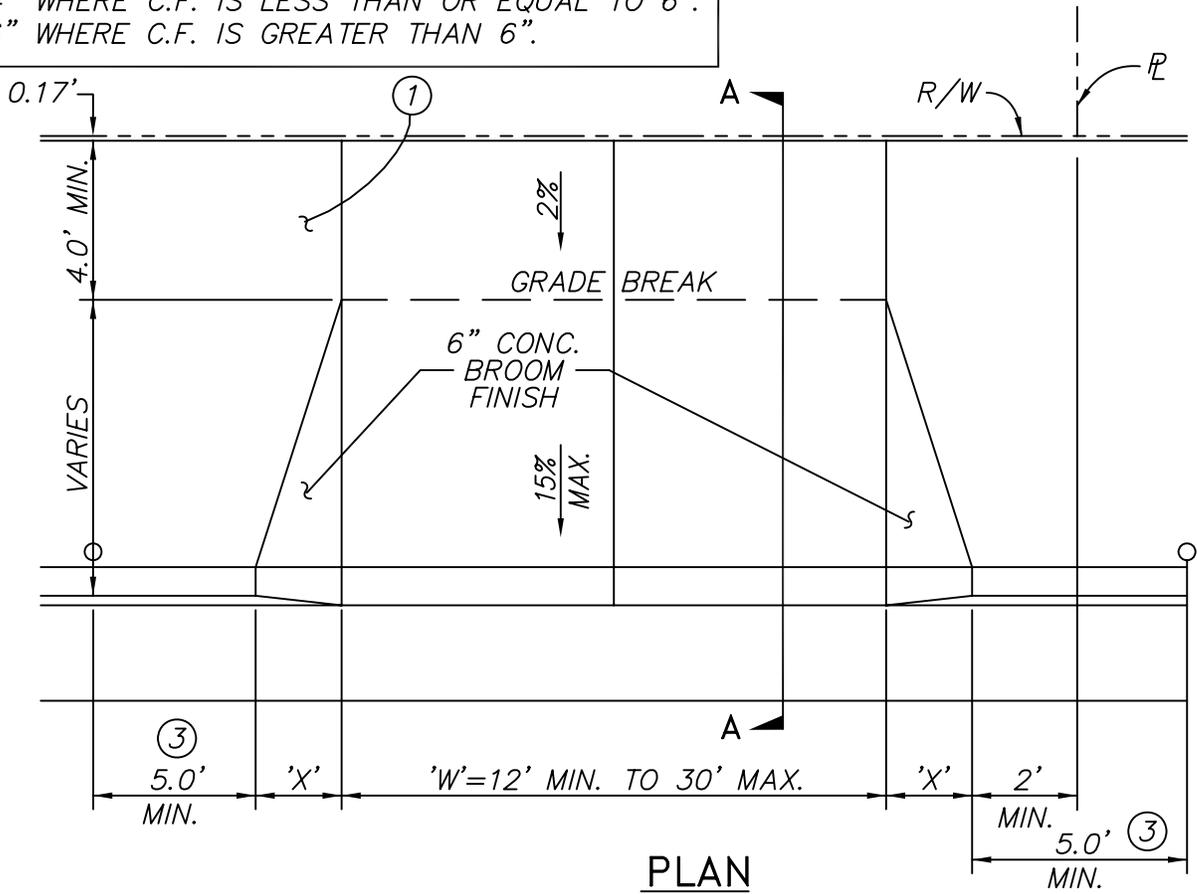

**SECTION A-A NEW CONSTRUCTION**

**NOTES:**

- ① CONSTRUCT SIDEWALK PER STD. PLAN 207.
- ② A.B. AS REQ'D PER STD. PLAN 202.
- ③ 5.0' MIN. CLEARANCE FROM TOP OF 'X' TO ANY ABOVE-GROUND OBSTACLE (I.E. SIGN, POLE, TREE, ETC.) FOR ANY WATER APPURTENANCE SEE WATER STANDARD PLANS, UNLESS OTHERWISE APPROVED BY THE CITY ENGINEER.

**GENERAL NOTES:**


- 1. 22' MIN. OF FULL HEIGHT CURB IS REQUIRED BETWEEN DRIVEWAYS SERVING THE SAME PARCEL, UNLESS OTHERWISE APPROVED BY THE CITY ENGINEER.
- 2. CONCRETE SHALL BE CLASS 520-C-2500.

APPROVED:

*[Signature]*  
 CITY ENGINEER

**CITY OF HUNTINGTON BEACH**

DEPARTMENT OF PUBLIC WORKS



REVISION DATE: May 2008

**RESIDENTIAL DRIVE APPROACH**

STANDARD PLAN  
 209  
 1 of 1