


STANDARD STREET SPECIFICATION				
RIGHT-OF-WAY ('R/W')	STREET WIDTH ('P')	STREET TYPE	PARKWAY WIDTH('PK')	PARKING REQUIREMENTS
54'	40'	COLLECTOR	7'	BOTH SIDES
52'	40'	RESIDENTIAL	6'	BOTH SIDES
44'	32'	RESIDENTIAL	6'	ONE SIDE **
60'	44'	INDUST/COMM.	8' *	BOTH SIDES

* MAY VARY WITH CITY ENGINEER APPROVAL

** PRIOR APPROVAL REQUIRED FROM CITY ENGINEER

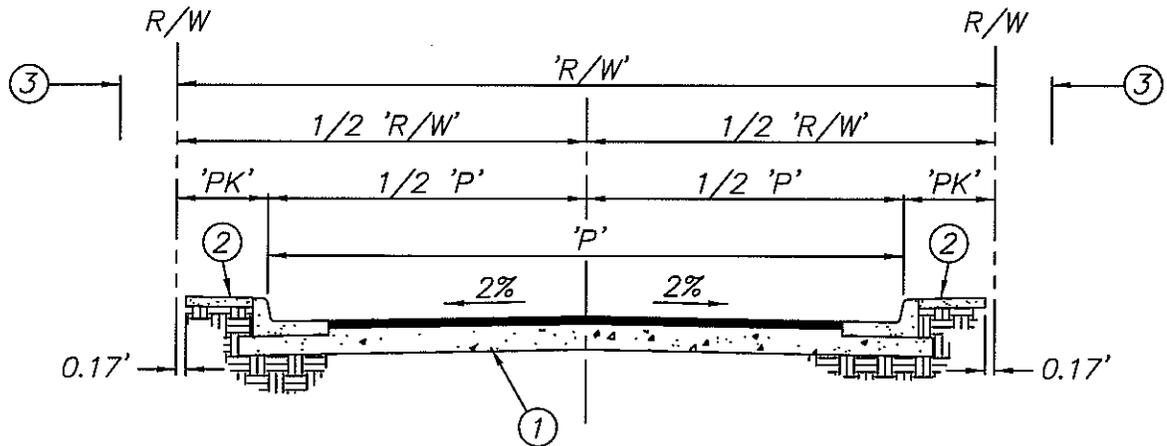

NOTES:

- ① STRUCTURAL SECTION TO BE DETERMINED BY R-VALUE TEST AND 20 YEAR TRAFFIC INDEX TO BE OBTAINED FROM CITY ENGINEER. RESIDENTIAL MINIMUM SECTION SHALL BE 0.33' A.C. WITH SS-1 SEAL COAT OVER 0.5' A.B.; INDUSTRIAL/COMMERCIAL MINIMUM SECTION SHALL BE 0.40' A.C. WITH SS-1 SEAL COAT OVER 0.83' A.B. T.I.
- ② PARKWAY AND SIDEWALK PER STD. PLAN 207.
- ③ 2' PUBLIC UTILITY EASEMENT (PUE) FOR PARKWAY 7' AND LESS.

GENERAL NOTES:

- 1. MINIMUM LONGITUDINAL GRADE SHALL BE 0.50% UNLESS OTHERWISE APPROVED.

APPROVED:

[Signature]
CITY ENGINEER

CITY OF HUNTINGTON BEACH

DEPARTMENT OF PUBLIC WORKS



LOCAL STREETS
TYPICAL SECTION

STANDARD PLAN
104
1 of 1

REVISION DATE: May 2008