



NOTES:

- ① AT STREET INTERSECTION WHERE TRAFFIC SIGNALS EXIST, OR ARE POSITIONED, THE CONDUIT SHALL BE INSTALLED AT A DEPTH OF 24".
- ② WHERE STREET SECTION IS GREATER THAN 18" IN THICKNESS, CONDUIT SHALL BE INSTALLED AT A DEPTH OF 6" GREATER THAN THE REQUIRED STREET SECTION.

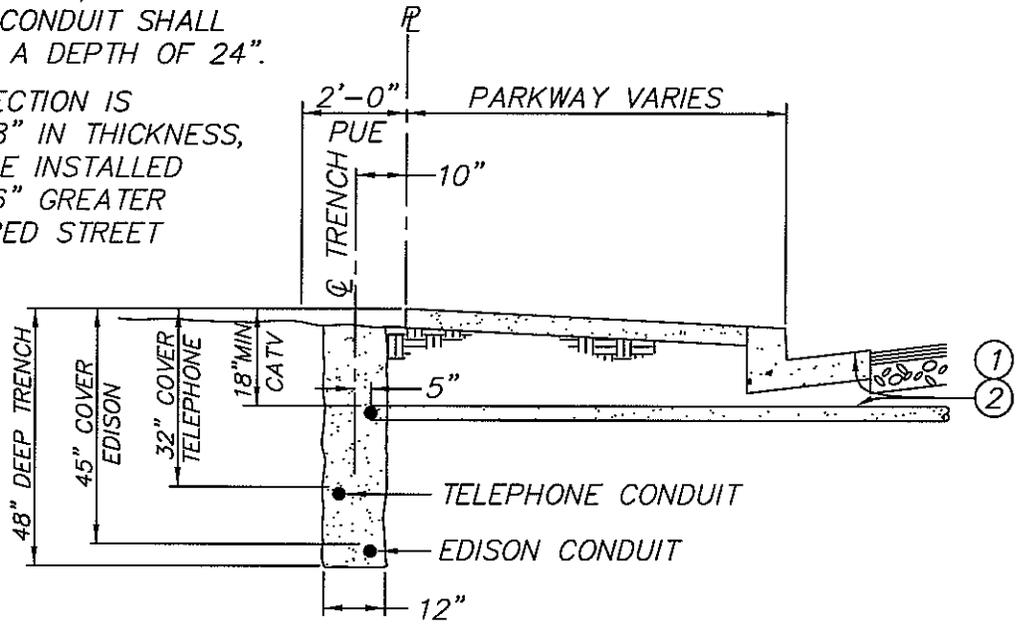

DETAIL "A"

FOR USE WHERE UTILITY FACILITIES ARE TO BE INSTALLED WITHIN THE 2' PUBLIC UTILITY EASEMENT

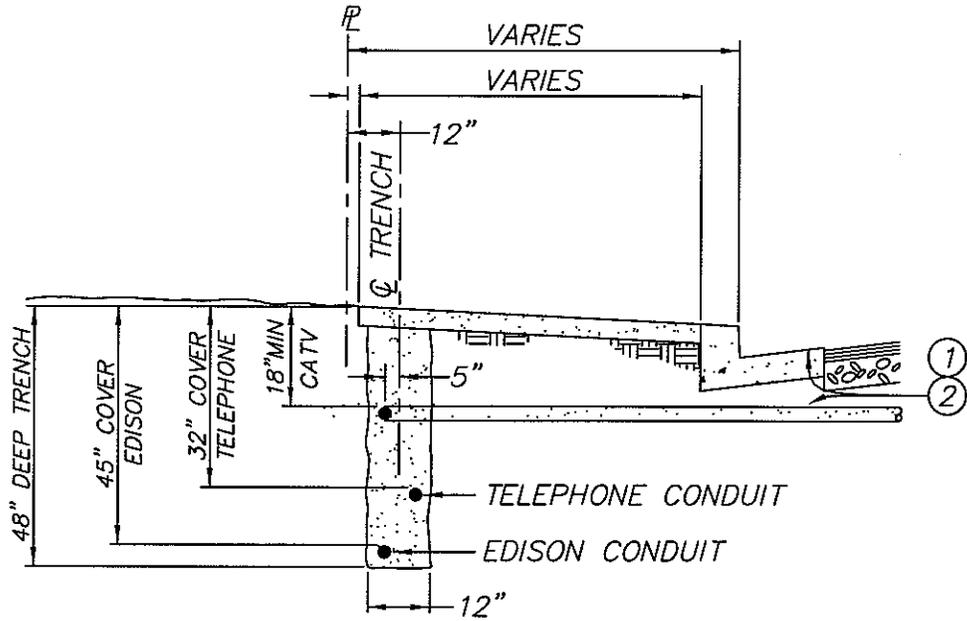

DETAIL "B"

FOR USE WHERE UTILITY FACILITIES ARE TO BE INSTALLED IN PARKWAY

APPROVED:

[Signature]
CITY ENGINEER

CITY OF HUNTINGTON BEACH

DEPARTMENT OF PUBLIC WORKS



UTILITY CONDUIT
LOCATIONS IN R/W

STANDARD PLAN
215
1 of 3

REVISION DATE: May 2008