

T-LOCK RIBS OUTSIDE
ON THE GAS FLAP.

4" TYP.
ALL AROUND

GAS FLAP

4"

SEE GENERAL
NOTE 2


WELD GAS FLAP TO
LINER WITH 1"
WELD STRIP

WELD ALL
AROUND POCKET

MANHOLE LINER

1/8"x1" FLAT STEEL
BAR SEALED IN PVC

SECTION C-C

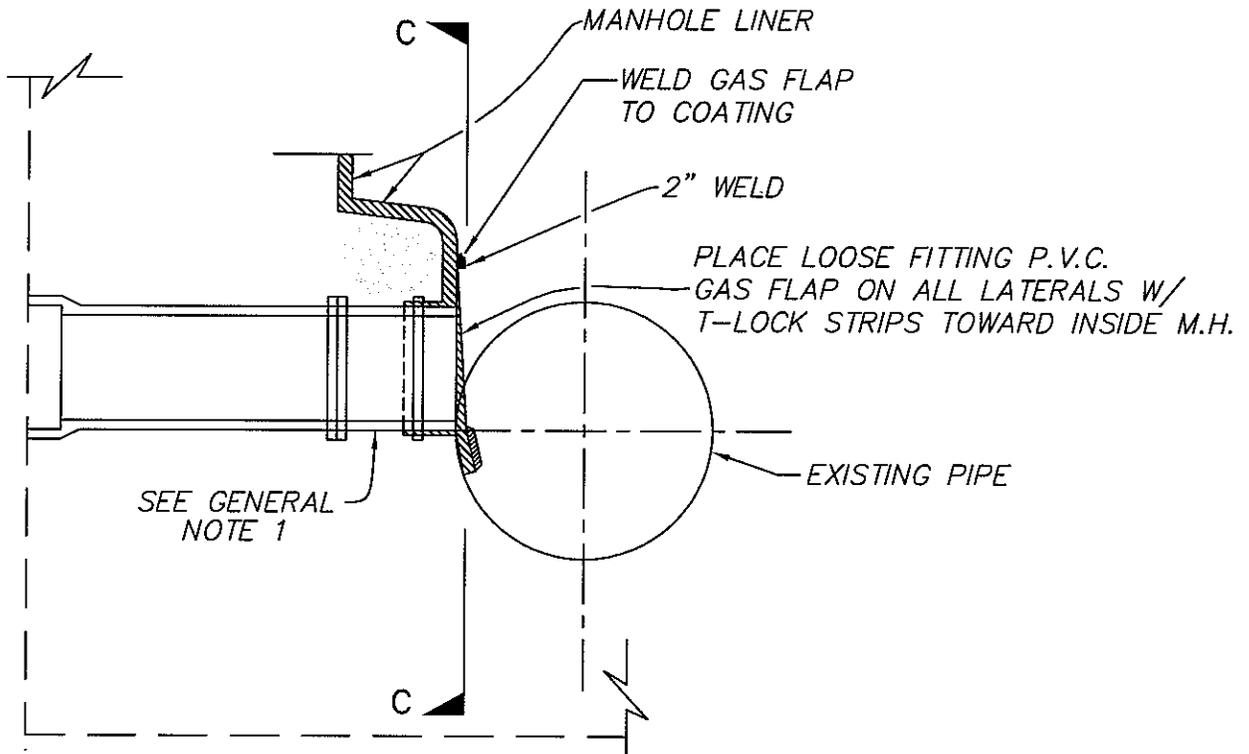

SEE GENERAL
NOTE 1

PLACE LOOSE FITTING P.V.C.
GAS FLAP ON ALL LATERALS W/
T-LOCK STRIPS TOWARD INSIDE M.H.

EXISTING PIPE

GENERAL NOTES:

1. FOR INSTALLATION AT EXISTING M.H., REMOVE INTERFERING CONCRETE AT END OF EACH LATERAL AND EXTEND PIPE AS SHOWN. GROUT IN PLACE. EXTEND COATING OVER GROUT AND INSTALL GAS FLAP AS SHOWN.
2. LINER SHALL MEAN POLYURETHANE LINER

APPROVED:



CITY ENGINEER

CITY OF HUNTINGTON BEACH

DEPARTMENT OF PUBLIC WORKS



REVISION DATE: MAY 2008

GAS FLAP

STANDARD PLAN

515
1 of 1